

SmarCore EHL


The new Engicam module standard SMARC, based on Intel® processors ELKHART LAKE™ series ATOM® x6000E build on new levels of CPU and graphics performance with integrated IoT features, real-time performance, manageability, security, and functional safety.



HIGHLIGHTS

- Standard SMARC
- Suitable for IoT and real time performance

APPLICATIONS

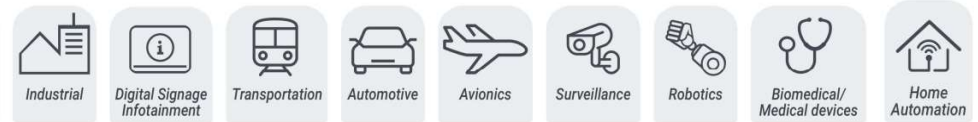

FEATURES



CPU

- Intel Atom X6211E Dual Core @ 1.2 GHz (burst 3.0 GHz) 1.5MB L2 cache, 6W
- Intel Atom X6413E Quad Core @ 1.5 GHz (burst 3.0 GHz) 1.5MB L2 cache, 9W
- Intel Atom X6425E Quad Core @ 1.8 GHz (burst 3.0 GHz) 1.5MB L2 cache, 12W
- Intel Atom X6212RE Dual Core @ 1.2 GHz, 1.5MB L2 cache, 6W
- Intel Atom X6414RE Quad Core @ 1.5 GHz, 1.5MB L2 cache, 9W
- Intel Atom X6425RE Quad Core @ 1.9 GHz, 1.5MB L2 cache, 12W
- Intel Atom X6427FE Quad Core @ 1.9 GHz, 1.5MB L2 cache, 12W
- Intel Atom X6200FE Dual Core @ 1.0 GHz, 1.5MB L2 cache, 4.5W



CORES

Up to 4 up to 1.9GHz, L2 cache 1.5MB



MEMORY

Starting from 2GB LPDDR4



GRAPHICS

- Intel® 11th generation (Gen 11) LP graphics controller.
- DirectX 12.1 compliant, OpenGL ES 3.1/3.0/2.0/1.1, OpenGL 4.5 supported, OpenCL™ 1.2, Vulkan 1.0 APIs, Dedicated FIVR for Graphics, Intel® Virtualization Technology for Directed I/O (VT-d)



VIDEO INTERFACES

- HDMI up to 4096x2160@60Hz
- eDP to LVDS Dual channel up to 1920x1080 @ 60Hz via eDP bridge
- DP up to 4096x2160@60Hz
- eDP up to 4096x2160@60Hz



VIDEO PROCESSING

- HEVC/H.265, H.264, VP9, VP8, WMV9/VC1, MPEG-2, VC-1. JPEG/MJPEG dec
- HEVC/H.265, H.264, VP9, JPEG/MJPEG enc



AUDIO

- I2S interface



NETWORKING

- 2x GB Ethernet interface



USB

- 2x USB HOST 3.0
- 3x USB HOST 2.0
- 1x USB OTG 2.0



MASS STORAGE

- Starting from 16GB eMMC drive soldered on-board
- SATA Gen3.2



PERIPHERAL INTERFACES

UART, I2C, SPI, CAN, SDIO, GPIOs, JTAG (optional)



PCIe

1x PCIe 3.0



OPERATING SYSTEM

- Ubuntu
- Windows 10



POWER SUPPLY

+5 V DC



DIMENSIONS

Standard SMARCTM 2.0 short size module



OPERATING TEMPERATURE*

Industrial (-40°C to 110°C Tj)

* Valid for all components except CPU. Customer shall consider junction temperature for CPU. Temperature will widely depend on application. Specific cooling solutions could be necessary for the final system.

BLOCK DIAGRAM

